


1.



2.

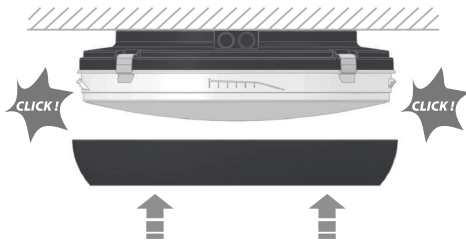


- Lämplig för montering dikt an normalt brännbart underlag
- Maximal omgivningstemperatur för säker drift är 25°C.
- Denna armatur får endast installeras och anslutas av behörig elektriker. Underlåtenhet i detta avseende gör garantin ogiltig.
- Byte av ljuskälla får endast utföras när ljuskällan har svalnat helt och spänningen är bruten.
- Vid rengöring, släck ljuskällan och låt den svalna helt. Använd mjuk trasa och undvik skarpa rengöringsmedel.
- Missbruk eller ändringar av armaturen gör garantin ogiltig.
- Armaturen är överkopplingsbar.




- Suitable for mounting directly onto normally flammable surfaces.
- Maximum ambient temperature for safe operation is 25°C.
- This luminaire must only be installed and connected by a suitably qualified electrical Contractor/Tradesperson. Failure in this regard voids the warranty.
- Relamping can only be done when the power is off and the lamp is completely cooled down.
- When the luminaire is to be cleaned, switch off mains and let it cool down completely. Clean the luminaire with a soft cloth and a standard PH neutral detergent.
- Misuse of, or changes to the luminaire voids the warranty.
- This luminaire was designed to be looped in.

Klass I/Class I



Klass II/Class II



DATA

Spänning/voltage	220-240VAC
Frekvens/frequency	50Hz
Kapslingsklass/protection	IP 65
Skyddsklass/electrical class	I & II
Ljuskälla/lamp	LED
Montage/mounting	Dikt tak/vägg/ surface

Se typetikett för effekt på din armatur.
Check type label for wattage on your lamp.



KLASS I/CLASS I



KLASS II/CLASS II